


NUMBER KEY

1. Combustible wooden stud wall partition
2. Fixing
3. Sheet metal shield
4. Appliance

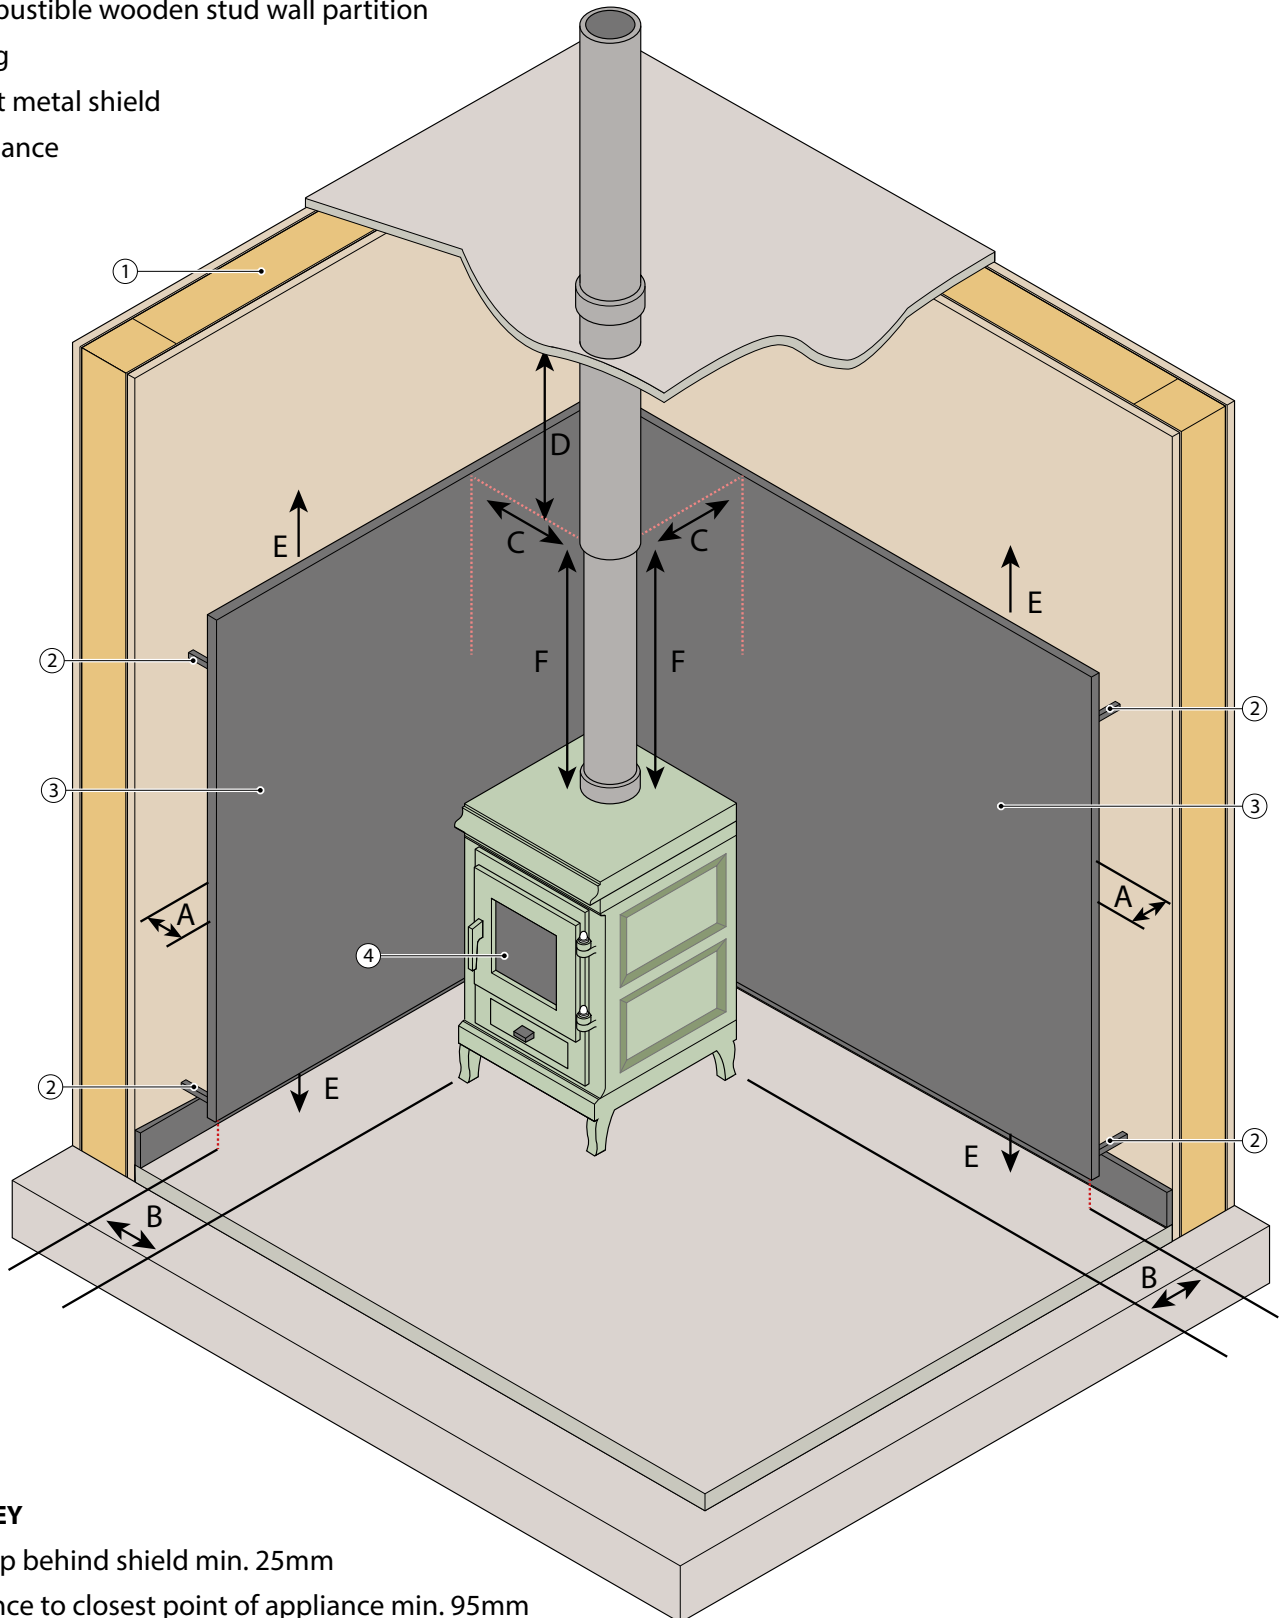


LETTER KEY

- A. Air gap behind shield min. 25mm
- B. Distance to closest point of appliance min. 95mm
- C. Distance from connecting flue pipe to metal shield:
1.5 x diameter of the flue pipe
- D. Distance from start of chimney to ceiling min. 425mm
- E. Air gap open at top and bottom:
min. 25mm from hearth to bottom of shield
- F. Distance from top of appliance to the top of the heat shield:
min. 300mm



NUMBER KEY

1. Combustible wooden stud wall partition
2. Fixing
3. Sheet metal shield
4. Appliance

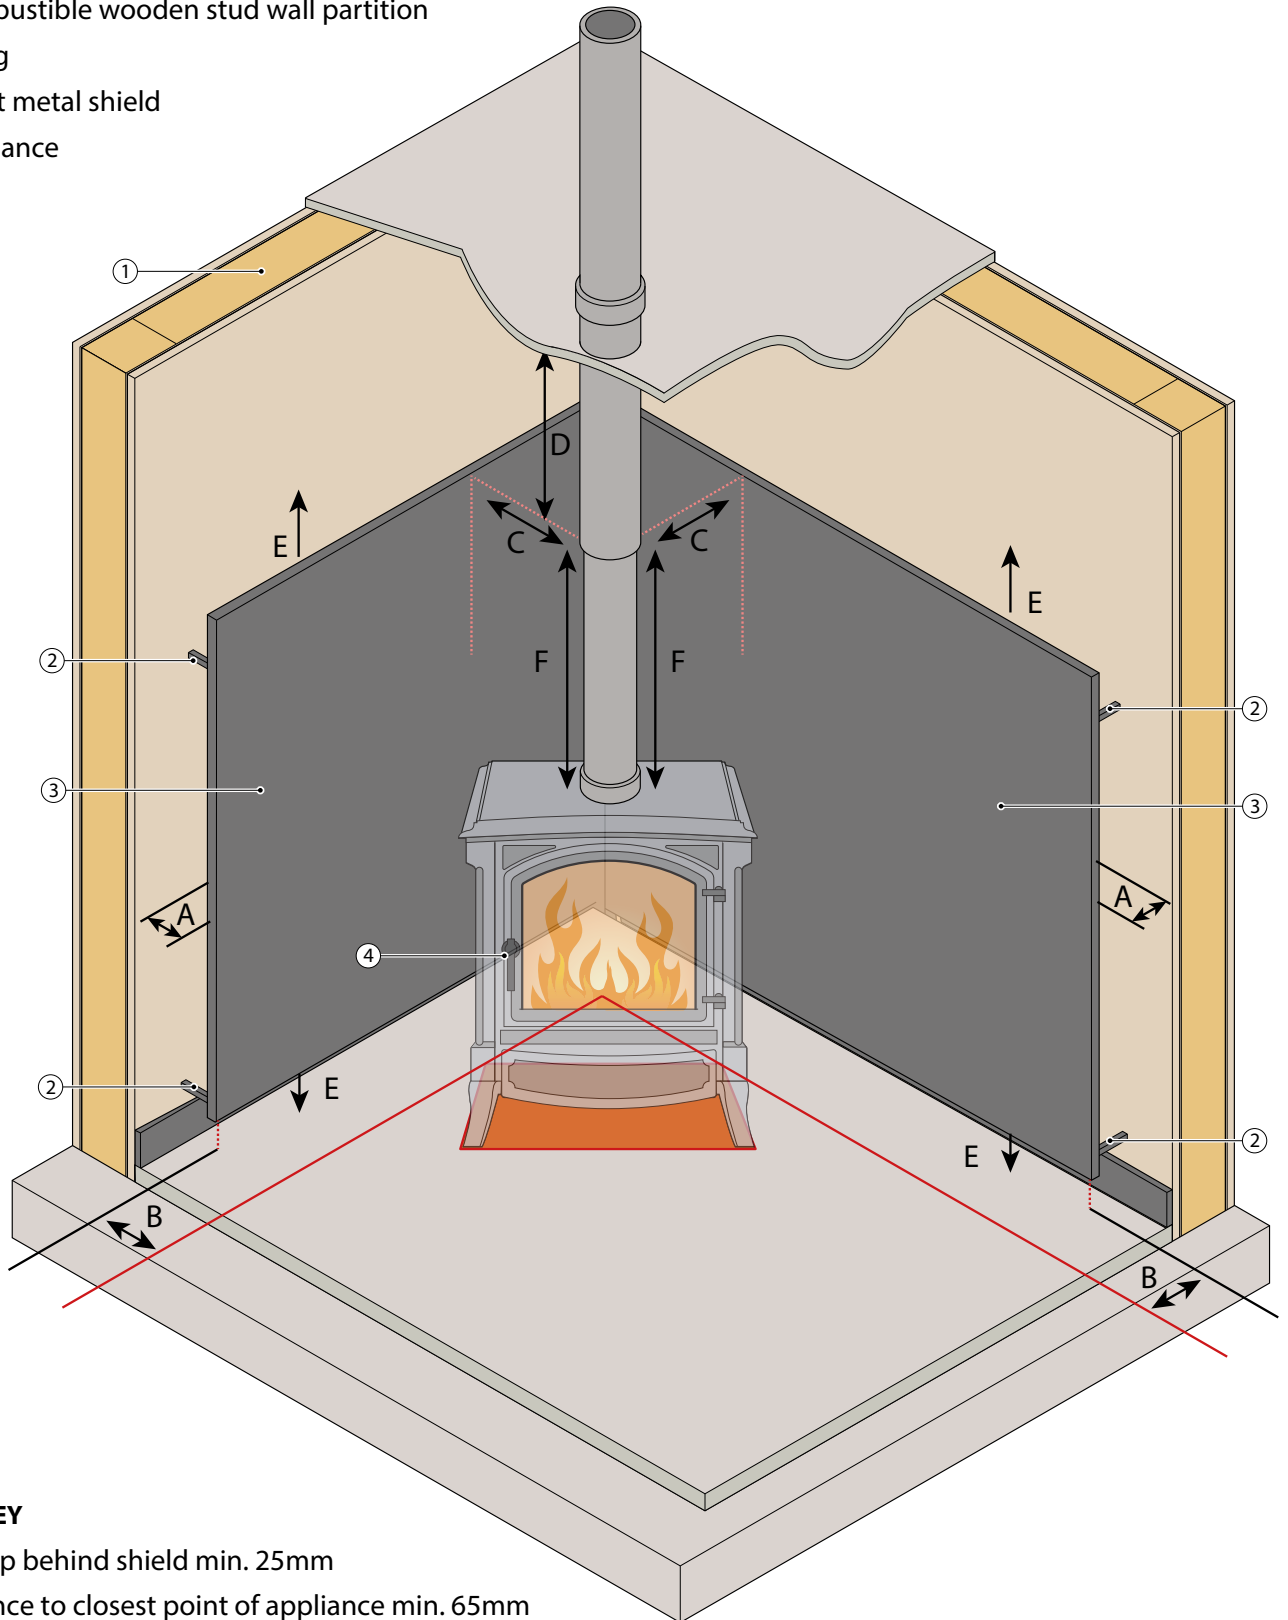

LETTER KEY

- A. Air gap behind shield min. 25mm
- B. Distance to closest point of appliance min. 65mm
- C. Distance from connecting flue pipe to metal shield:
1.5 x diameter of the flue pipe
- D. Distance from start of chimney to ceiling min. 425mm
- E. Air gap open at top and bottom:
min. 25mm from hearth to bottom of shield
- F. Distance from top of appliance to the top of the heat shield:
min. 300mm

